

Polypropelene Ball Valves



The Toughest Range

Parixit brand Polypropelene Ball Valves are available from 1/2" to 6" in size and made from 100% virgin Polypropelene grade. Each valve is hydraulically tested at 10 kg/cm² and three piece butted constructed as per BS-10 (D,E,F.), ANSI 16.5 (ASA 150) and ND-10-D. The most important part of a valve is ball, made from special grade of Polypropelene. Ball valves can be used in chemical industry, sugar industry, colour and paint industry, varnish plant, breweries and distilleries, water works, automobile industry, agriculture, food and dairy industry.


Parixit Industries Limited

An ISO 9001 & 14001 Company



TRYING ALWAYS FOR BETTER

Part	Material	
1. Body	PP	
2. Side	PP	
3. Ball	PP or filled PP	
4. Seat	Taflon	
5. Spindle	M.S./PP	
6. Stud & nuts	M.S. / Zinc coated	
7. Nut cap	PP	
8. Washer	G.I.	
9. Bolt	G.I.	
10. Handle	M.S. / PP	
11. Handle cap	PP	
12. 'O' ring	PVC or Neoprene or Teflon	
13. 'O' ring	PVC or Neoprene or Teflon	

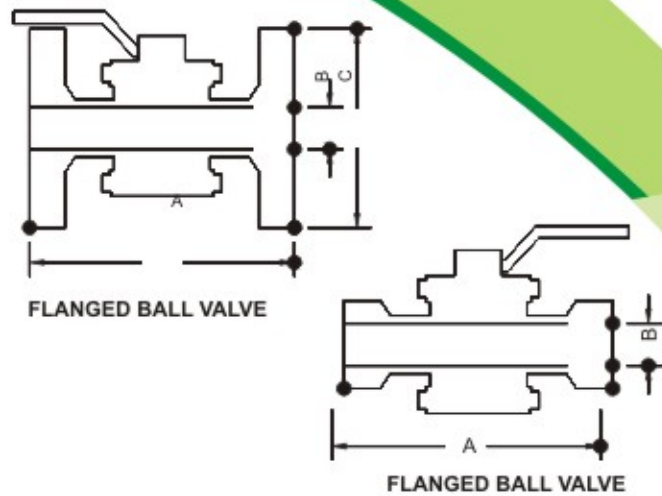

FLANGED AND BALL VALVE

FLANGED VALVE SIZE	FLANGE O.D. (mm)	I.D OF BALL VALVE (mm)	FACE TO FACE LENGTH (mm)
½"	101	15	135
¾"	101	20	135
1"	120	25	155
1 ½"	140	38	180
2"	165	50	200
2 ½"	180	63.5	230
3"	200	75	245
4"	230	100	290
6"	295	150	420

All dimensions are in mm. tolerance ± 2 mm
working pressure : 7.5 kg/cm²

SCREW AND BALL VALVE

FLANGED VALVE SIZE	I.D OF BALL VALVE (mm)	FACE TO FACE LENGTH (mm)
½"	15	107
¾"	20	109
1"	25	128
1 ½"	38	164
2"	50	180
2 ½"	63.5	240

All dimensions are in mm. tolerance ± 2 mm
working pressure : 7.5 kg/cm²

Our range also includes:



Flush Valve



Glass flow Indicator



Flangedend Valves



Screwend Valves



Super Ball Valves

Parixit Industries Limited

301-308, 3rd Floor, Silver Oaks, Near Mahalakshmi Cross Roads, Paldi,
Ahmedabad-380007 • Ph.: +91-79-66318121-24 • Fax: +91-79-66318125
E-mail : ho@parixit.com • www.parixit.com



TRYING ALWAYS FOR BETTER